

Sideflexing chains
1873 MX1

Movex[®]


RANGE EXTENSION

1873 MX1

Sideflexing plastic chain

RANGE EXTENSION

The stainless steel version is supplied with LONG-LIFE SS roller chain. | TPE Rubber: 85 ShA | Backflex radius min.: 200 mm | Sideflex radius min.: 457 mm

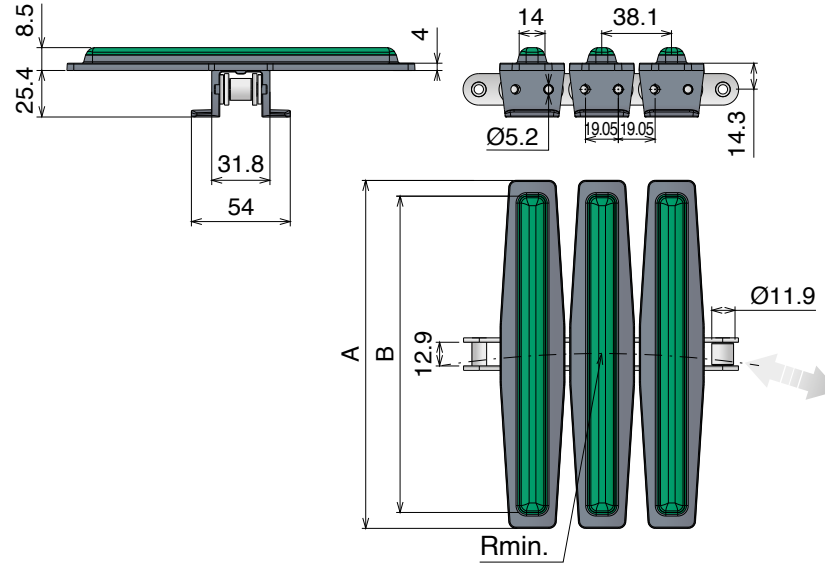

Chain for hot-fill applications, neck & cap sterilizing.

Care

Designed to keep the products in the correct position during the twist movement.

Temperature resistance

The rubber is developed for and perfectly resistant against the higher temperatures of the hot-filled products.

Long life roller chain

Hardened pins and bushing guarantee a longer lifetime. Chain twist 90° in 1500 mm.

Product stability

The design guarantees a perfect connection between rubber and plate.



10 feet
3.048 m
80 flights

SPROCKET
ASA 60
Standard on market

LF					
Article-Nr.	Chain	A (Plate Width) mm	B (Rubber Width) mm	Weight kg/m	Max working load N
11790107	C45	190,5	170,0	3,30	4500
11780107	Nickel Plated Steel	190,5	170,0	3,30	4500
11690107	Stainless Steel	190,5	170,0	3,30	3500
11790108	C45	254,0	223,5	3,60	4500
11780108	Nickel Plated Steel	254,0	223,5	3,60	4500
11690108	Stainless Steel	254,0	223,5	3,60	3500
11790111	C45	295,0	280,0	3,90	4500
11780111	Nickel Plated Steel	295,0	280,0	3,90	4500
11690111	Stainless Steel	295,0	280,0	3,90	3500

MX					
Article-Nr.	Chain	A (Plate Width) mm	B (Rubber Width) mm	Weight kg/m	Max working load N
11790307	C45	190,5	170,0	3,30	4500
11780307	Nickel Plated Steel	190,5	170,0	3,30	4500
11690307	Stainless Steel	190,5	170,0	3,30	3500
11790308	C45	254,0	223,5	3,60	4500
11780308	Nickel Plated Steel	254,0	223,5	3,60	4500
11690308	Stainless Steel	254,0	223,5	3,60	3500
11790311	C45	295,0	280,0	3,90	4500
11780311	Nickel Plated Steel	295,0	280,0	3,90	4500
11690311	Stainless Steel	295,0	280,0	3,90	3500

Movex[®]

www.movexii.com

RANGE EXTENSION