

Modular belt
530 FT

Movex[®]
RANGE EXTENSION

530 FT One track Belt


Modular Belt Series 530 FT, H=8,7

Range extension

Pitch: 15 mm | Backflex radius min.: 10 mm


CODE STRUCTURE GUIDE (Example)

5321	01	9450	A
Series	*Material	Width	Version

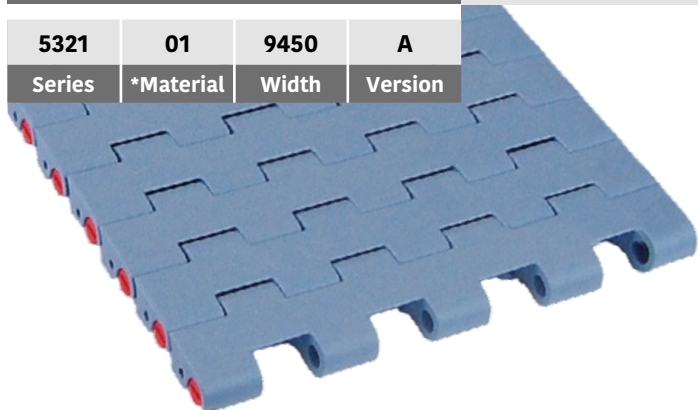

K450

Version A - Standard

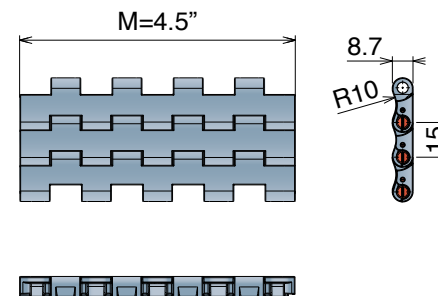

Version A - Standard

Series	Material	Width	Version
5321	*	9450	A

*Material

Easy Delivery

LFA - Code 01
Low friction Acetal

Max w. load: 3000 N
Weight: 9,2 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

MX - Code 03
Performance PBT

Max w. load: 2400 N
Weight: 9,0 kg/m²
Temp. range dry: -40+120 °C
Temp. range wet: -40+60 °C
Pin material: POM grey

DKM - Code 16
Aramide Reinforced Acetal

Max w. load: 3000 N
Weight: 9,2 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

MWX - Code 17
Polyamide Composite

Max w. load: 3000 N
Weight: 9,5 kg/m²
Temp. range dry: -40+104 °C
Temp. range wet: NR
Pin material: PBT white

MPX - Code 25
Lubricated Acetal


Max w. load: 3000 N
Weight: 9,2 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

530 FT Modular belt


Modular Belt Series 530 FT, H=8,7 M=3"

Pitch: 15 mm | Backflex radius min.: 10 mm

CODE STRUCTURE GUIDE (Example)			
5321	01	003	A
Series	*Material	Width	Version

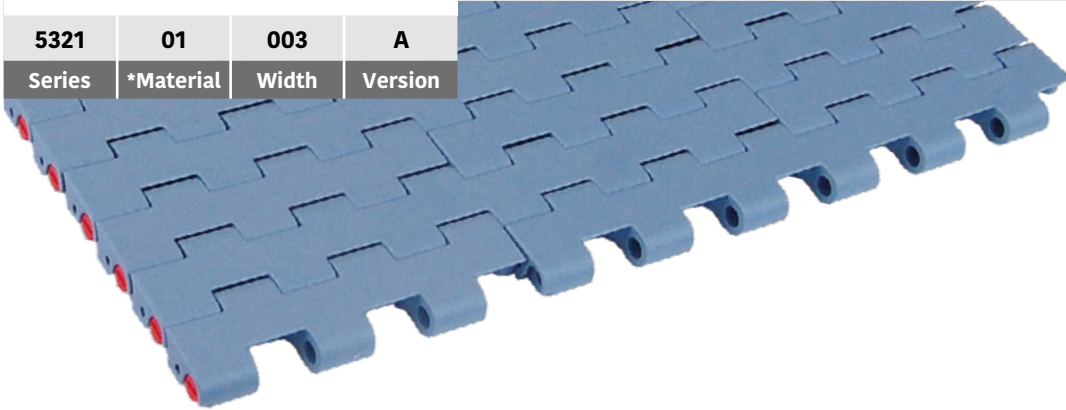


Version A - Standard

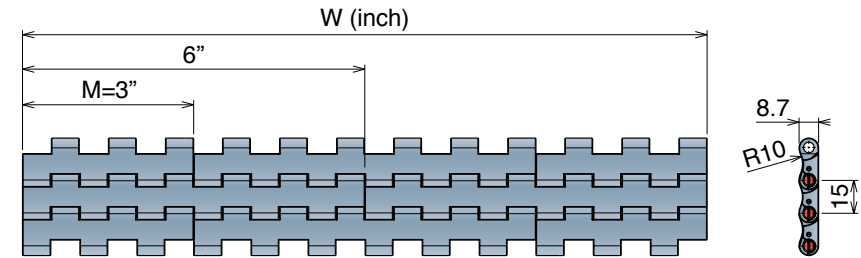

Version A - Standard

Series	Material	Width	Version	Series	Material	Width	Version
5321	*	0003	A	5321	*	0030	A
5321	*	0006	A	5321	*	0033	A
5321	*	0009	A	5321	*	0036	A
5321	*	0012	A	5321	*	0039	A
5321	*	0015	A	5321	*	0042	A
5321	*	0018	A	5321	*	0045	A
5321	*	0021	A	5321	*	0048	A
5321	*	0024	A	5321	*	0051	A
5321	*	0027	A	5321	*	0054	A



*Material

Easy Delivery

LFA - Code 01
Low friction Acetal

Max w. load: 26000 N/m
Weight: 9,2 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

MX - Code 03
Performance PBT

Max w. load: 21000 N/m
Weight: 9,0 kg/m²
Temp. range dry: -40+120 °C
Temp. range wet: -40+60 °C
Pin material: POM grey

DKM - Code 16
Aramide Reinforced Acetal

Max w. load: 26000 N/m
Weight: 9,2 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

MWX - Code 17
Polyamide Composite

Max w. load: 26000 N/m
Weight: 9,5 kg/m²
Temp. range dry: -40+104 °C
Temp. range wet: NR
Pin material: PBT white

MPX - Code 25
Lubricated Acetal

Max w. load: 26000 N/m
Weight: 9,2 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

Movex[®]

www.movexii.com

RANGE EXTENSION