



Modular belt
550 Vacuum

Movex[®]

PRODUCT PRESENTATION

550 V Modular belt


Series 550 FT, H=8,7 M=85

NEW


CODE STRUCTURE GUIDE (Example)

Pitch: 25.4 mm | Backflex radius min.: 25 mm

5508	01	0085	A
Series	*Material	Width	Version

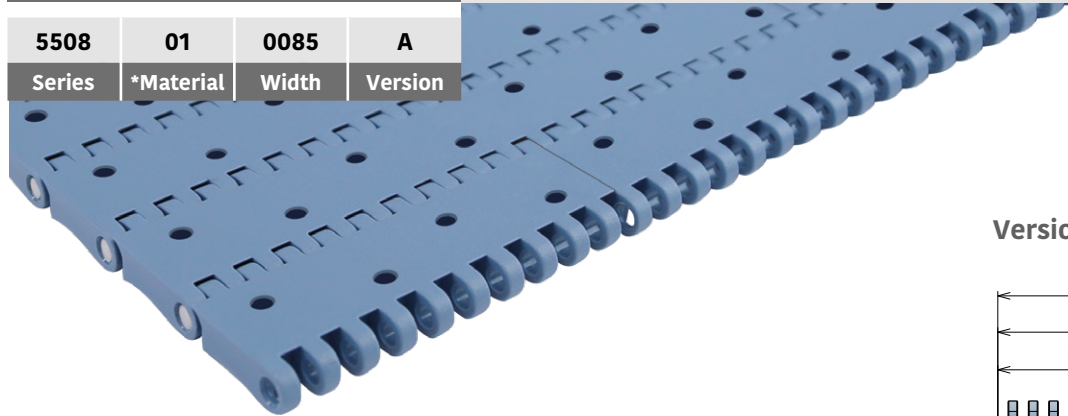

Version A - Standard

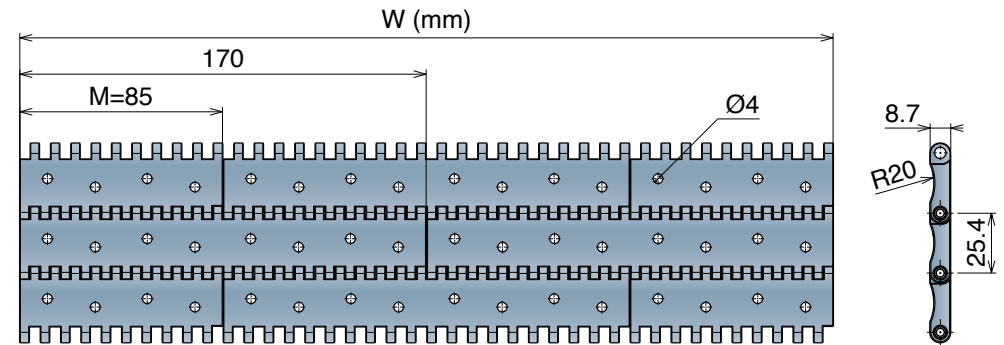

Series	Material	Width	Version
5508	*	0085	A
5508	*	0170	A
5508	*	0255	A
5508	*	0340	A
5508	*	0425	A
5508	*	0510	A
5508	*	0595	A
5508	*	0680	A
5508	*	0765	A

Series	Material	Width	Version
5508	*	0850	A
5508	*	0935	A
5508	*	1020	A
5508	*	1105	A
5508	*	1190	A
5508	*	1275	A
5508	*	1360	A
5508	*	1445	A
5508	*	1530	A

*Material

LFA - Code 01 Low friction Acetal

Max w. load: 25500 N/m
 Weight: 9,0 kg/m²
 Temp. range dry: -40+80 °C
 Temp. range wet: -40+65 °C
 Pin material: PBT white

MX - Code 03 Performance PBT

Max w. load: 20500 N/m
 Weight: 8,7 kg/m²
 Temp. range dry: -40+120 °C
 Temp. range wet: -40+60 °C
 Pin material: POM grey



- Easier installation
- Quicker maintenance
- 100% interchangeable

Movex[®]

www.movexii.com

PRODUCT PRESENTATION