



Modular belt
550 Vacuum

K85 & K450

Movex[®]

PRODUCT DATASHEET


550 V Modular belt

Series 550 FT, H=8,7 M=85


CODE STRUCTURE GUIDE (Example)

Pitch: 25.4 mm | Backflex radius min.: 25 mm

| | | | |
|--------|----------|-------|---------|
| 5508 | 12 | 9085 | A |
| Series | Material | Width | Version |

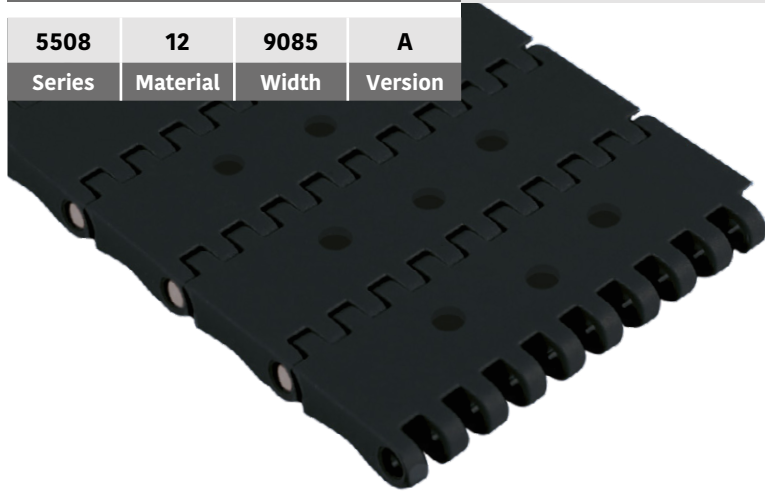


Version A - Standard

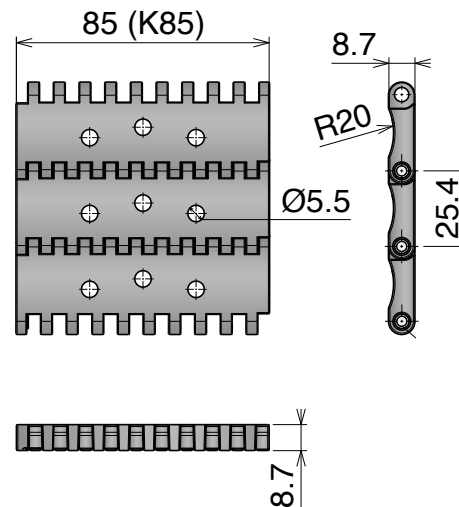

| |
|-------------|
| Article-Nr |
| 5508129085A |

Version A - Standard

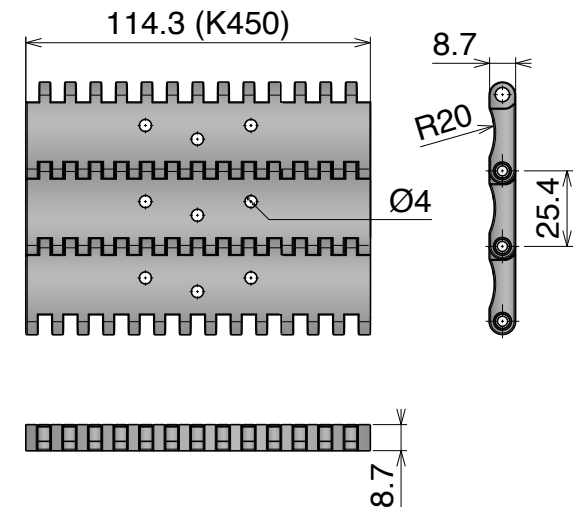

| |
|-------------|
| Article-Nr |
| 5508129115A |

Material

AS - Code 12
Antistatic Acetal

Max w. load: 2500 N/m
Weight: 8,5 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: PBT white



- Easier installation
- Quicker maintenance
- 100% interchangeable

NEW

550 FT and V One track belt
MOVEX TOOL

The specific tool for belts developed to facilitate belt assembly and disassembly.



Article Nr. **29970**

Movex[®]

www.movexii.com

PRODUCT DATASHEET